APPLICATION BRIEF / CUSTOMER-CONFIRMED

Tube handling — feeder to assembly

Northline Integration · example company / Confirmed Nov 4, 2026

HANDLING OBJECTIVE

Move two sizes of soft tubes from a feeder, up an incline, and deliver them individually to an assembly station.

Infeed / source **Customer feeder**	Receiving process **Assembly station**
Handling object **Soft elastomer tubes in two variants. Protect the surface and keep each tube separate.**	Surface constraint **Avoid marking or pinching the soft tube surface**

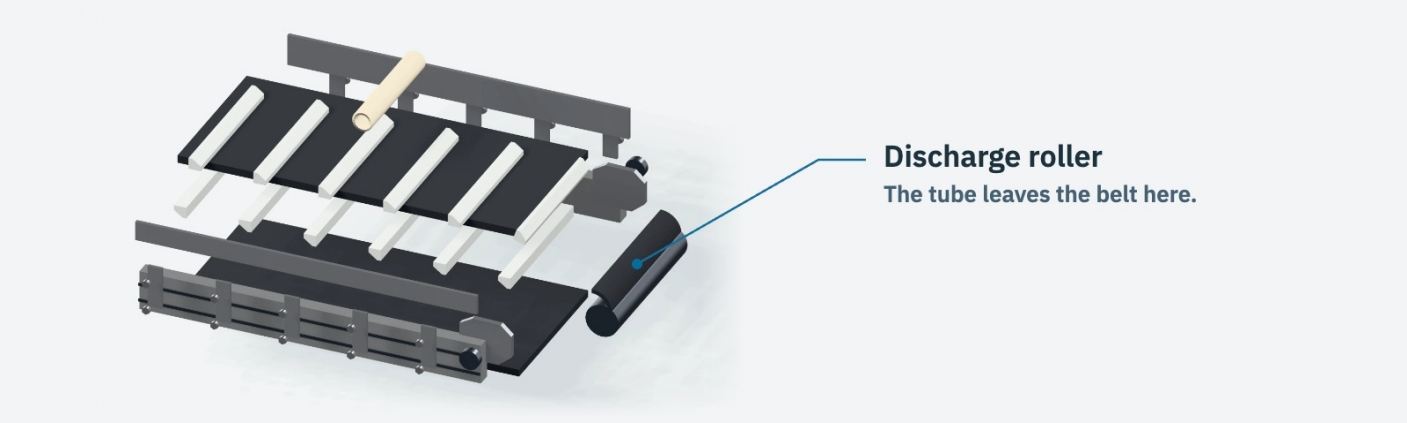


Fig. 01 Discharge assembly from the illustrative tube-transfer model. Reference geometry only.

NEXT DISCUSSION

Who supplies the transition between the 1450 mm discharge and the proposed 1520 mm receiving station?

Agree who supplies controls and integration.

APPLICATION BRIEF / ENGINEERING RECORD

Requirements & responsibilities

Part dimensions

Variant	Outside diameter	Length
Tube A	12 mm	160 mm
Tube B	16 mm	240 mm

Movement & constraints

Infeed height
850 mm

Discharge height
1450 mm

Receiving station height
1520 mm

Height difference (receiving minus discharge)
+70 mm

Requested delivery rate
20 parts/min

Delivery
One tube at a time

Accumulation
Not requested

Orientation
Maintain tube orientation at discharge

Available space
Available footprint to be confirmed with a layout drawing

Operating environment
Indoor assembly area

Requested interface responsibilities

Supports
Customer

Infeed connection
Customer

Discharge connection
To discuss

Controls and integration
MK to discuss

Project & contact

Contact
Alex Morgan

Organization
Northline Integration · example company

Email
alex@example.com

Location
Connecticut, USA

Requested timing
Planning for the next production phase; date to discuss

Additional notes
This is an illustrative request. No equipment selection, capacity or delivery date has been confirmed.